

AT-3

3 HEAD FILLER | SEAMER

**Get the quality
you need now—
and the speed
you'll want later.**



36

Cans Per Minute

71" x 27"

Operating Footprint

Portable

For Storage or
Transportation

Flexible


Slim, Sleek, Standard

Upgradeable to 6 heads on the same chassis—
no footprint changes

Delays the investment: in higher speed until it's
truly needed

Integrated tank pressure control: monitors and
adjusts tank pressure from the filler's panel for
consistent fills and reduced waste.

Fast, tool-free changeovers : minimize downtime
and simplify SKU changes.

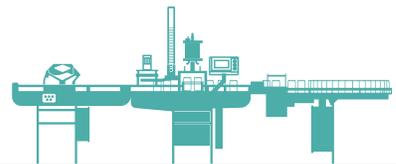

Build a complete line with ACM.

RT-212 Infeed Table

Offering expanded accumulation, pre-rinse,
and an integrated mount for date coders.

PTA Can Handle Applicator

Reduce the number of operators needed by
automatically applying PakTech® brand handles.

AT-3


Atmospheric
3 Head Filler | Seamer

Machine Specifications

Machine Weight	275.6 LBS
Power Requirements	5.4A @ 110-120 VAC, 50 Hz 5.4A @ 110-120 VAC, 60 Hz 2.7A @ 220-240 VAC, 50 Hz 2.7A @ 220-240 VAC, 60 Hz
Compressed Air Requirements	Pressure: 100-170 PSI Flow Rate: 7.8 SCFM (FAD) @ 100 PSI (1 ACFM @ 100 PSI)
CO² Requirements	Pressure: 40-90 PSI Regulator Flow Coefficient: 0.15 Cv or Higher

Connections	
Air In	1/4" Industrial QC Male
CO₂ In	1/4" Industrial QC Male
Product In	1.5" Sanitary Tri-Clamp
Rinse Water In	3/4" GHT Female
Drain Pan Out	3/4" GHT Male
Tank Control CO₂ Out	1/4" Industrial QC Female

Supply Compatibility	
Can Diameter	Standard 211
	Sleek 204
	Slim 202
End Style & Size	CDLW (200)
	CDL-E (202)
	CDL+ (202)
	SuperEnd® (202)
	B64/LOE (200, 202)

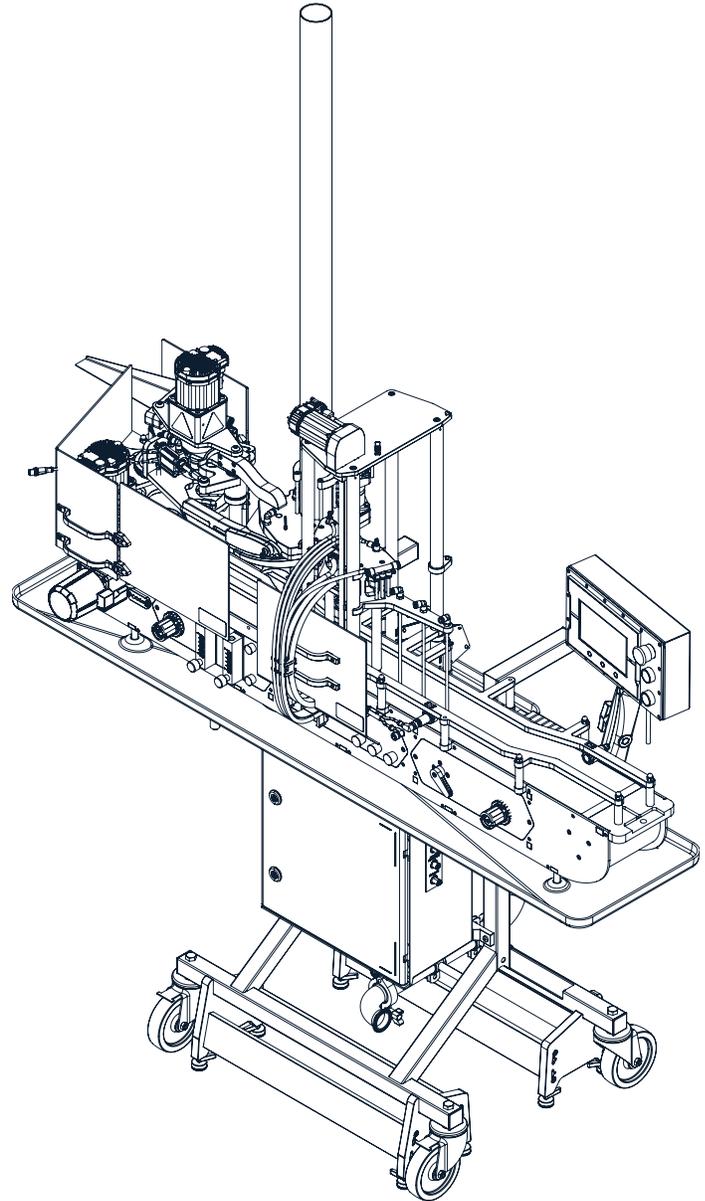


AT-3


Atmospheric
3 Head Filler | Seamer

Machine Specifications

TOP VIEW

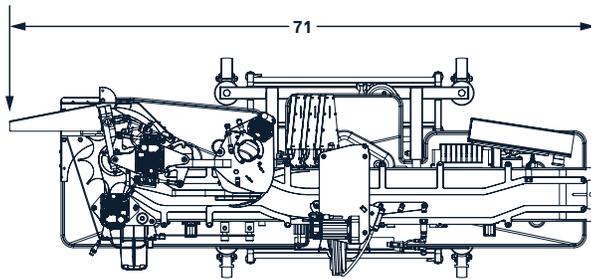

FRONT VIEW

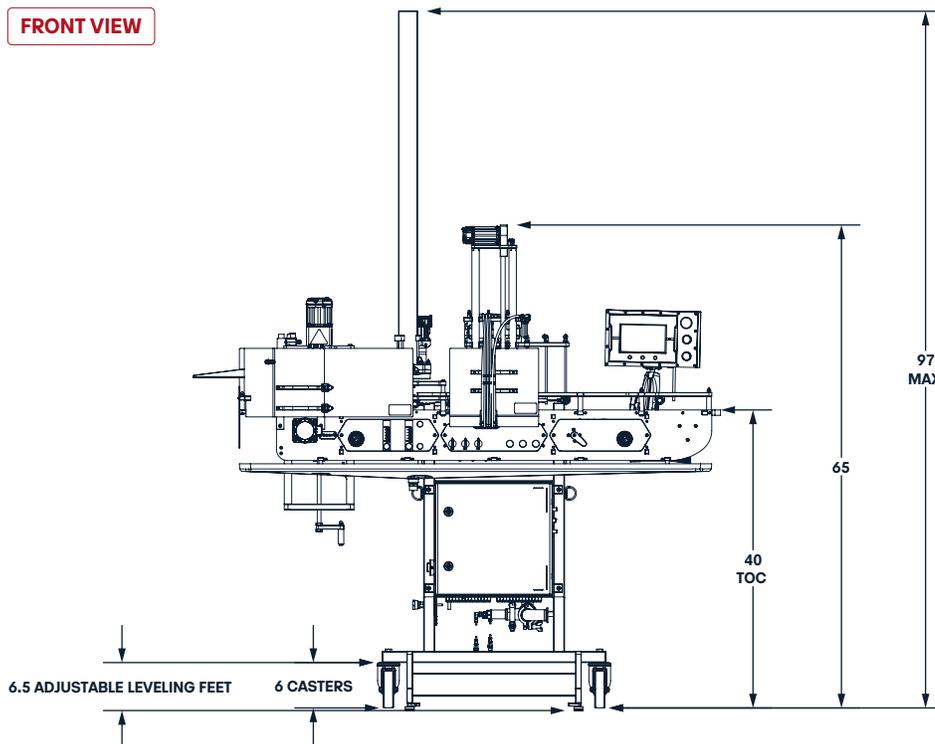

SIDE VIEW

