

AT-6

6 HEAD FILLER | SEAMER

The Speed You Need to Scale



Fast: A reliable 60 can per minute production rate with the unique ability to run 30 cans per minute on a single lane.

Serviceable: Easy-to-access, easy-to-change components, combined with some toolless adjustments, help decrease downtime and maintain productivity.


Precise: Optimized product control system for ideal fill quality and reduced product loss.

60
Cans Per Minute

71" x 27"
Operating Footprint

Portable
For Storage or Transportation

Flexible
Slim, Sleek, Standard

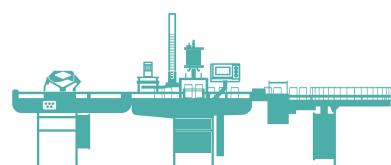

Build a complete line with ACM.

RT-212 Infeed Table

Offering expanded accumulation, pre-rinse, and an integrated mount for date coders.

PTA Can Handle Applicator

Reduce the number of operators needed by automatically applying PakTech® brand handles.

AT-6


Atmospheric
6 Head Filler | Seamer

Machine Specifications

Machine Weight	275.6 LBS
Power Requirements	5.4A @ 110-120 VAC, 50 Hz
	5.4A @ 110-120 VAC, 60 Hz
	2.7A @ 220-240 VAC, 50 Hz
	2.7A @ 220-240 VAC, 60 Hz
Compressed Air Requirements	Pressure: 100-170 PSI
	Flow Rate: 7.8 SCFM (FAD) @ 100 PSI (1 ACFM @ 100 PSI)
CO ₂ Requirements	Pressure: 40-90 PSI
	Regulator Flow Coefficient: 0.15 Cv or Higher

Connections	
Air In	1/4" Industrial QC Male
CO ₂ In	1/4" Industrial QC Male
Product In	1.5" Sanitary Tri-Clamp
Rinse Water In	3/4" GHT Female
Drain Pan Out	3/4" GHT Male
Tank Control CO ₂ Out	1/4" Industrial QC Female

Supply Compatibility	
Can Diameter	Standard 211
	Sleek 204
	Slim 202
End Style & Size	CDLW (200)
	CDL-E (202)
	CDL+ (202)
	SuperEnd® (202)
	B64/LOE (200, 202)

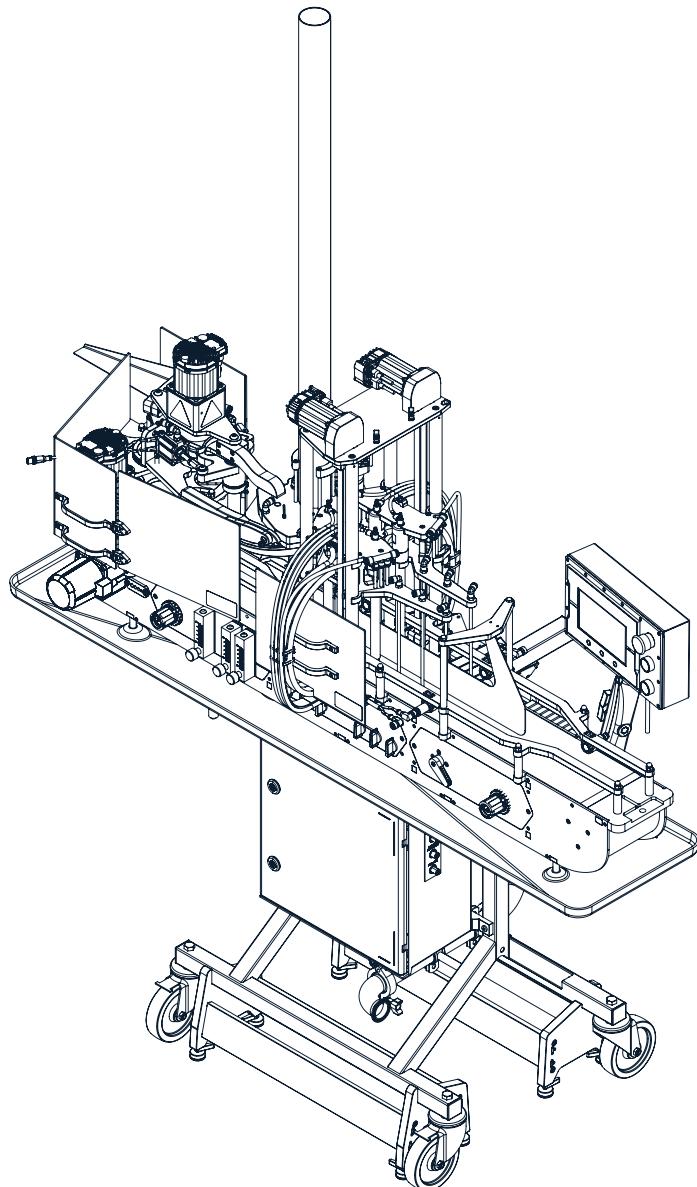


AT-6


Atmospheric
6 Head Filler | Seamer

Machine Specifications

TOP VIEW

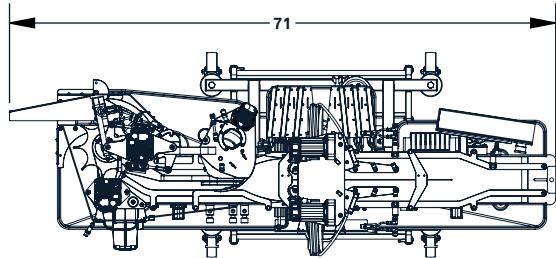

FRONT VIEW

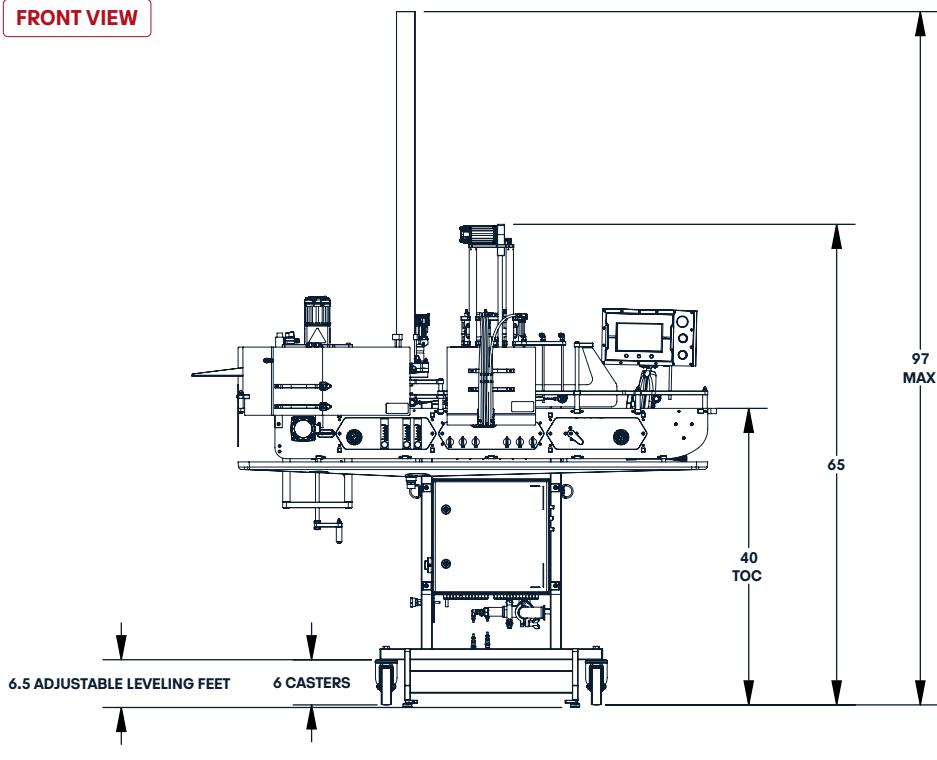

SIDE VIEW

