

# RT-212

ROTARY INFEED TABLE


## Ready to Perform, Easy to Store



**Mobile:** Originally designed for use in mobile canning, the RT-212 is built on casters for ease and mobility.

**Compact:** Smaller than a depalletizer while in operation, the table folds for easy storage and transport between packaging runs.

**Date Coding:** An integrated print-head mount provides space for a date-code printer on the outlet side of the flip rinse.

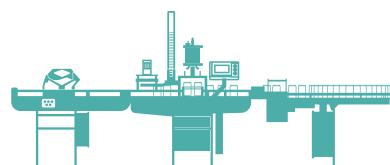

**Build a complete line with ACM.**

### CP-4 Filler/Seamer

Deliver consistent fills at 20-30 cans per minute with intuitive counterpressure technology.

### PTA Can Handle Applicator

Reduce the number of operators needed by automatically applying PakTech® brand handles.


# RT-212

Rotary Infeed Table

Machine Specifications

Machine Weight	151.1 LBS (Casters) or 142.9 LBS (Feet)
Power Requirements	0.7 A @ 110-120 VAC, 50-60 Hz 0.35 A @ 220-240 VAC, 50-60 Hz

Supply Compatibility	
Can Diameter	Standard 211 Sleek 204 Slim 202

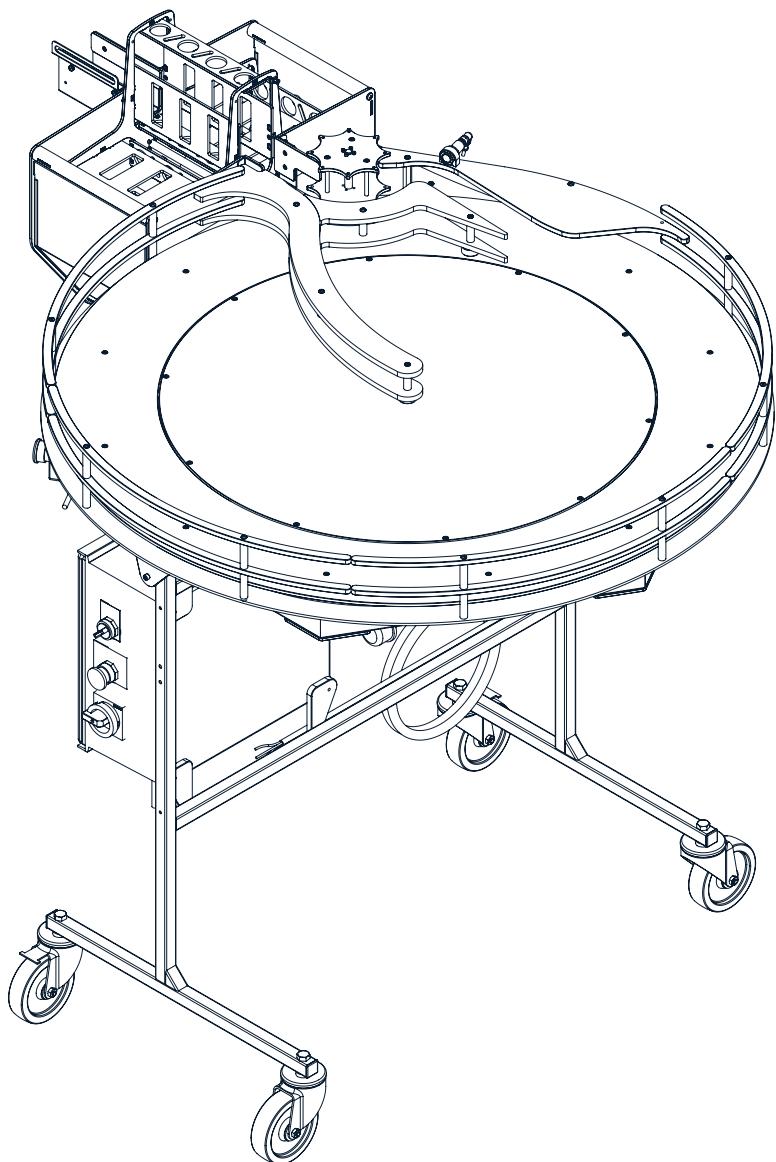

**acm** AMERICAN  
CANNING  
MACHINES

512.355.0100  
sales@canwithacm.com  
canwithacm.com




# RT-212

Rotary Infeed Table

Machine Specifications


TOP VIEW

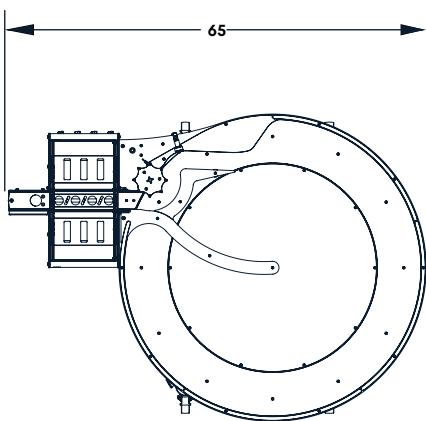


1. Top of conveyor is a fixed height specified at time of purchase (non-adjustable)
2. Top of conveyor in the table below includes the height of the mounting option

MOUNT OPTIONS	TOC	
	MIN (IN)	MAX (IN)
Casters (6IN)	36	46
6" Feet +/- 2.0" Adjustability	32.5 (MIN POSITION)	45.5 (MAX POSITION)

FRONT VIEW

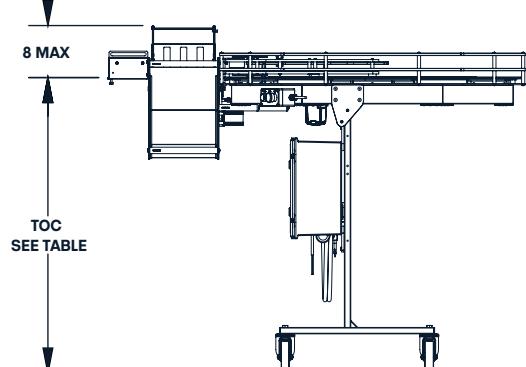

STORAGE VIEW

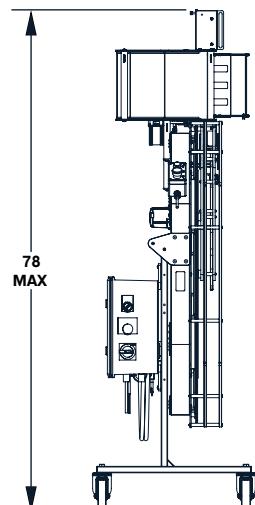

SIDE VIEW

