

AT-1^{V2}

1 HEAD FILLER | SEAMER

Empowered Small Batch Canning



6-12
Cans Per Minute

Single
Operator

40" x 24"
With RT-20 Table

Integrated
Infeed/Outfeed

Small: An automated countertop system, complete with infeed/outfeed accumulation, that sits comfortably on a rolling cart for easy transport and storage between canning runs.

Approachable: Programmed with a simple and intuitive one-page user interface for use by a single operator of any experience level.

Empowering: Our best selling, small batch solution, intentionally designed to facilitate innovation and flexibility.



The AT-1^{V2} is built to package carbonated beverages of any fill volumes from 8oz to 19.2oz, in standard (211), sleek (204.5), and slim (202) body diameter cans.

AT-1^{V2}


Atmospheric
Countertop Filler | Seamer

Machine Specifications

Machine Weight	98.4 LBS (AT-1) & 23.4 LBS (RT-20)
Power Requirements	3A @ 110-120 VAC, 50-60 Hz
	1.5A @ 220-240 VAC, 50-60 Hz
Compressed Air Requirements	Pressure: 100-170 PSI
	Flow Rate: 1.5 SCFM (FAD) @ 100 PSI (0.2 ACFM @ 100PSI)
CO² Requirements	Pressure: 15-25 PSI

Connections	
Air In	¼" Industrial QC Male
CO₂ In	¼" Industrial QC Male
Product In	1.5" Sanitary Tri-Clamp
Rinse Water In	¾" GHT Female
Drain Pan Out	¼" NPT Barbed Fitting to 48" Hose


Supply Compatability	
Can Diameter	Standard 211
	Sleek 204
	Slim 202
End Style & Size	CDLW (200)
	CDL-E (202)
	CDL+ (202)
	SuperEnd® (202)
	B64/LOE (200, 202, 204, 206)

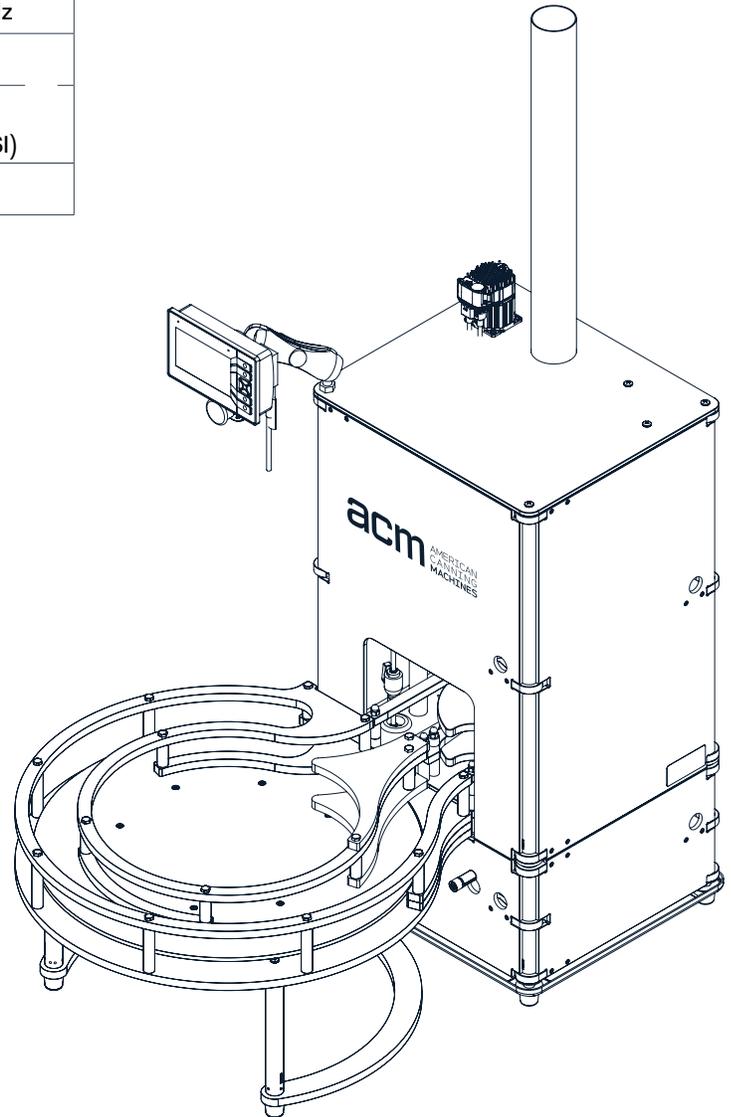


AT-1^{V2} Atmospheric Countertop Filler | Seamer

Machine Specifications

TOP VIEW

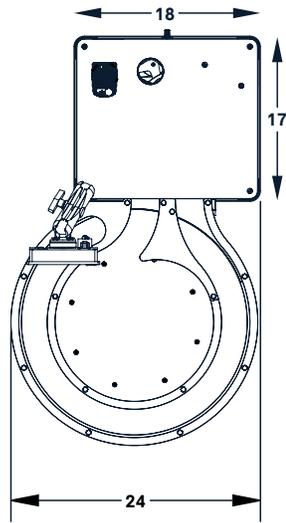

FRONT VIEW

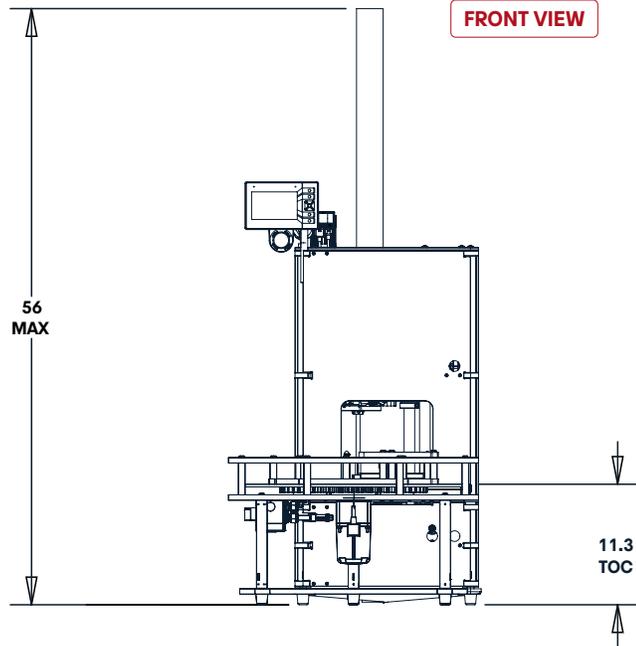

SIDE VIEW

